

NVE
NVE CORPORATION

NEW!
Integrated DC-DC
Convertors











Isolation Products

Short-Form Catalog

Best-in-Class Digital Isolators and Transceivers

IL7xx / IL2xx / IL76xx High-Performance Isolators

Versatile Workhorse Isolators



Our award-winning flagship Isolators provide performance and flexibility, including highest data rates, smallest packages, lowest distortion, low power consumption, and 44000-year barrier life.

**Best-in-Class
6 kV
Isolation**



IL76xx parts have integrated 3.3-to-3.3 volt DC-to-DC converters.

VE-Series versions have extremely high isolation voltages of 6 kV_{RMS} and 12.8 kV surge immunity, and are ATEX and IECEx certified as Intrinsically Safe.

Popular applications include serial interfaces, isolated SPI, and switch-mode power supplies.

Features:

- Low EMI emissions
- Excellent magnetic immunity
- World's smallest isolators available (MSOP8 and QSOP16)
- Highest isolation voltage (6 kV_{RMS})
- Optional integrated DC-to-DC converters (IL76xx)
- Fastest (to 150 Mbps) and lowest PWD (300 ps)

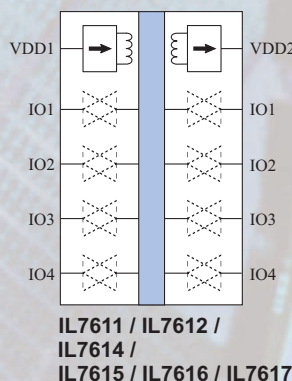

Parameter	Min.	Typ.	Max.	Units
Data Rate (Std./S-Series)	100 / 130	110 / 150		Mbps
PWD (Std./S-Series)		3 / 0.3	3	ns
Pulse Jitter		100		ps
Quiescent Supply Current		1.2	1.75	mA/ch
Isolation (Standard/VE-Series)	2.5 / 6			kV _{RMS}



IL4xx, IL3xxx, and IL41050xx

Single-Chip Isolated Network Transceivers

NVE offers a broad range of isolated RS-422, RS-485 and CAN network transceivers. Standard isolation voltage is 2500 volts. VE-Series versions have best-in-class six kilovolt isolation and are ATEX and IECEx certified as Intrinsically Safe.

The IL4622 and IL4822 combines an isolated RS-485 transceivers with integrated 3.3-volt or five-volt DC-to-DC convertors.









Versions are available in unique 0.15-inch SOICs and true eight-millimeter creepage 0.3-inch SOICs, as well as exclusive QSOPs.

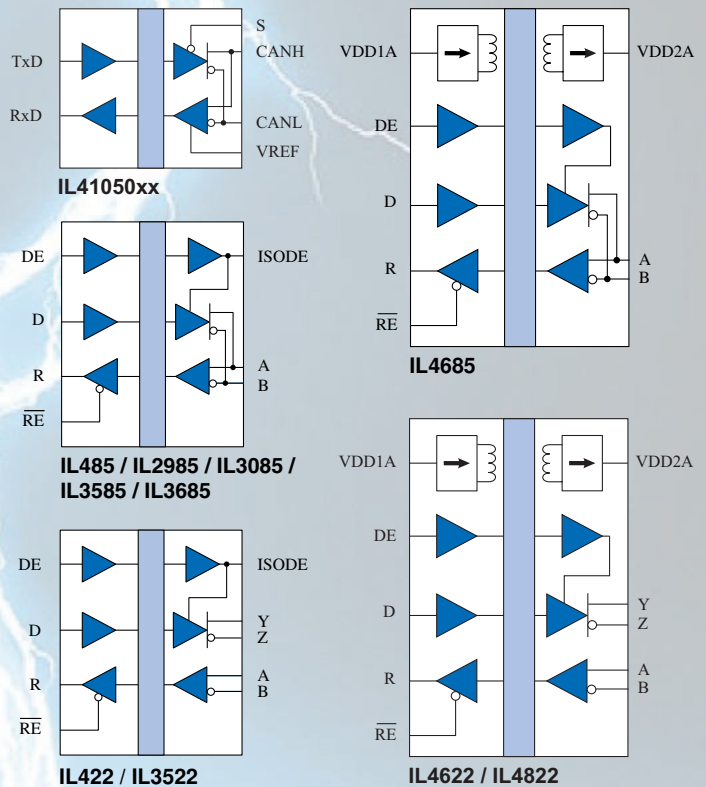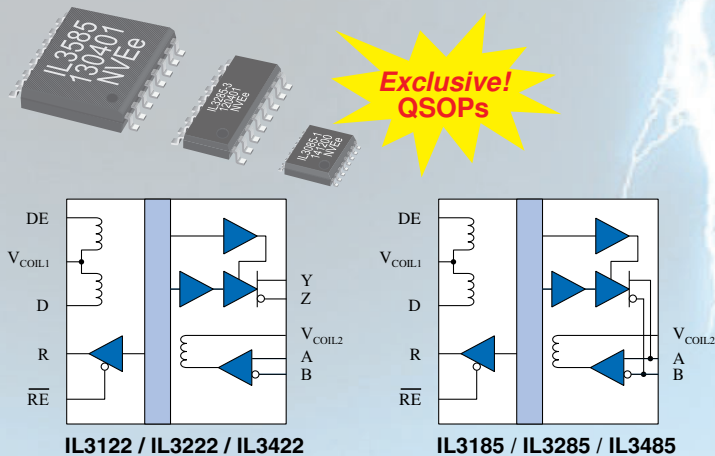

Model	Bus	Inputs	Mbps	Nodes	Bus ESD	Key Features	Available Packages
IL41050TT	CAN	Digital	1	110	4 kV	Low Cost	0.3" SOIC16
IL41050TA	CAN	Digital	1	110	4 kV	125 °C; Silent Mode	QSOP16; 0.15" SOIC16; 0.3" SOIC16
IL41050TFD	CAN-FD	Digital	5	110	4 kV	CAN-FD	QSOP16; 0.15" SOIC16; 0.3" SOIC16
IL3122	RS-422	Passive	5	32	15 kV	Low Cost	0.15" SOIC16; 0.3" SOIC16
IL3185	RS-485	Passive	5	32	15 kV	Low Cost	0.15" SOIC16; 0.3" SOIC16
IL3222	RS-422	Passive	5	256	15 kV	1/8 Unit Load	0.15" SOIC16; 0.3" SOIC16
IL3285	RS-485	Passive	5	256	15 kV	1/8 Unit Load	0.15" SOIC16; 0.3" SOIC16
IL3422	RS-422	Passive	20	32	15 kV	High Speed	0.15" SOIC16; 0.3" SOIC16
IL3485	RS-485	Passive	20	32	15 kV	High Speed	0.15" SOIC16; 0.3" SOIC16
IL422	RS-422	Digital	25	32	15 kV	Legacy Standard	0.3" SOIC16
IL485	RS-485	Digital	35	32	2 kV	Legacy Standard	0.3" SOIC16
IL3022	RS-422	Digital	4	32	7.5 kV	Low Cost	0.3" SOIC16
IL2985	RS-485	Digital	4	32	15 kV	Low Power	0.3" SOIC16
IL3085	RS-485	Digital	4	32	15 kV	Low Cost	QSOP16; 0.15" SOIC16; 0.3" SOIC16
IL3522	RS-422	Digital	40	50	15 kV	Very High Speed	0.3" SOIC16
IL3585	RS-485	Digital	40	50	15 kV	Very High Speed	0.15" SOIC16; 0.3" SOIC16
IL3685	RS-485	Digital	40	50	15 kV	PROFIBUS	QSOP16; 0.15" SOIC16; 0.3" SOIC16
IL3685P	RS-485	Digital	40	160	16.5 kV	3.3 V bus; 1/5 U.L.	QSOP16; 0.3" SOIC16
IL4822	RS-422	Digital	40	160	16.5 kV	3.3-5V DC-DC Convertor	0.3" SOIC16
IL4622	RS-485	Digital	40	160	16.5 kV	3.3-3.3V DC-DC Conv.	0.3" SOIC16

IL5xx and IL8xx Data Couplers

DC-Correct Isolation




IL500 and IL800T Isolators have internal refresh clocks to ensure DC-correct operation and that the output follows the input on power-up. Parts are available in one, two, three, or four channel configurations, and in SOIC or unique MSOP packages.

The top-of-the-line IL800-Series isolators are specified to 110 Mbps and 125 °C. The cost-effective IL500-Series is rated to 2 Mbps and 85 °C.

Features:

- DC correct
- 2 Mbps (IL500-Series) or 110 Mbps (IL800-Series)
- 2500 V_{RMS} isolation
- 85 °C (IL5xx) or 125 °C (IL8xx) operating temperature
- 44000-year barrier life
- MSOP and SOIC packages

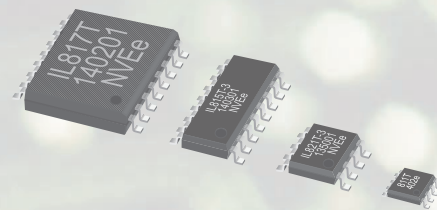

Parameter	Min.	Typ.	Max.	Units
Data Rate (IL5xx)	2			Mbps
Data Rate (IL8xx)	100	110		Mbps
PWD (IL5xx / IL8xx)			10 / 3	ns
Pulse Jitter (IL8xx)		100		ps
Quiescent Supply Current		1.3	1.8	mA/ch
Transient Immunity	30	50		kV/μs
Isolation Voltage	2.5			kV _{RMS}
Temperature (IL5xx / IL8xx)	-40		85 / 125	°C

IL6xx Passive-Input Isolators

Ultrahigh Common Mode Transient Immunity



Unique IL600 and IL600A Series Isolators have passive inputs for flexibility similar to LED-input optocouplers. But unlike optocouplers they have virtually unlimited barrier life. And unlike other nonoptical isolators, they have ultrahigh Common-Mode Transient Immunity, making them ideal for H-bridges, floating supply applications, or noisy environments.

“IL6xxCMTI” grade parts are 100% tested to ensure each part has at least 200 kV/μs CMTI. Simple external deglitch circuitry can extend the CMTI to an extraordinary 350 kV/μs typical. CMTI grade also has an extended supply range of up to 6.6 volts for compatibility to directly drive a range of power MOSFETs or gate driver ICs.


The IL600-Series has CMOS outputs and the IL600A-Series has open-drain outputs.

Features:


- Up to 350 kV/μs CMTI (IL6xxCMTI)
- 3 to 6.6 V supply range (IL6xxCMTI)
- 5 mA input current
- No carrier or clock for low EMI emissions and susceptibility
- Inherently failsafe
- DC correct
- 2500 V_{RMS} isolation
- 44000-year barrier life
- MSOP, SOIC, PDIP, or bare die

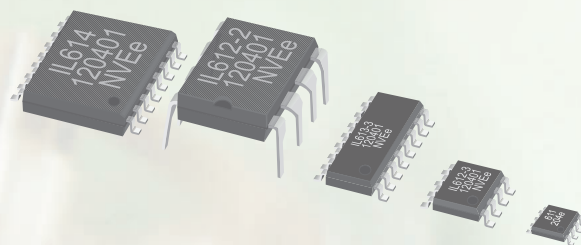


IL610A




IL610




IL611A




IL611




IL612A



IL612



IL613




IL614


Parameter	Min.	Typ.	Max.	Units
Data Rate (Standard / A-Series)	100 / 10			Mbps
Common Mode Transient Immunity				
Standard grade	15	20		kV/μs
“CMTI” versions	200	220		
“CMTI” versions; external deglitch)	300	350		
Pulse Width Distortion		3	5	ns
Propagation Delay		8	15	ns
Propagation Delay Skew		4	6	ns
Operating Temperature	-40		85	°C

IL01x Ultralow-Power Isolators


Unique TMR Technology




IL011




IL012



IL015



IL016



IL017

IL01x-Series Tunneling Magnetoresistance (TMR) low-power isolators use NVE's patented low-power spintronic Tunneling Magnetoresistance (TMR) technology. Total quiescent current of just 0.3 milliamps per channel is one-fourth the power of NVE's flagship isolators.

Like all NVE isolators, a unique ceramic/polymer composite barrier provides excellent isolation, best-in-class barrier resistance, and virtually unlimited barrier life.

Even with the low power, the new parts provide remarkable **performance**:

- 0.3 mA/channel total power consumption
- 10 Mbps guaranteed data rate
- No carriers or clocks for low electromagnetic interference
- 2500 V isolation
- 44000 year barrier life
- ATEX and IECEx certified Intrinsically Safe
- -40 to 100 °C

Applications:


- 4-to-20 mA loop-powered controls
- Battery-powered instruments
- SPI interfaces

Parameter	Min.	Typ.	Max.	Units
Quiescent power ($I_{DD1} + I_{DD2}$)		0.3	0.5	mA/channel
Data Rate	10			Mbps
Temperature Range	-40		100	°C



DC-DC Convertors

The World's Smallest DC-DC Convertors



We've extend out award-winning isolation technology to ultraminiature DC-to-DC converters and isolators with integrated DC-to-DC converters.

ILDC1x parts are 3.3 volt input, quarter-watt stand-alone DC-to-DC converters that are ideal for generating a second isolated supply in isolator systems. They are available in either a 16-pin wide-body SOIC, or a six-pin 3 mm by 5.5 mm DFN package. The DFN versions are the world's smallest isolated DC-to-DC converters.


IL46xx transceivers combine RS-485 or RS-422 interface with a DC-to-DC converter to create its own isolated bus supply, dramatically reducing board space and parts count.

The IL76xx-Series combines high-speed two-, three-, or four-channel datacouplers with integrated DC-to-DC converters.


The DC-to-DC converters require no additional regulation and there is no minimum load. Frequency hopping and shielding reduce EMI, and ferrite beads are not necessary for EMI mitigation. Integrated short-circuit protection avoids excessive power dissipation.

DC-to-DC Converter Features:


- Quarter-watt output
- 3.3 V input
- 3.3 V (ILDC11), 5 V (ILDC12), or 6 V (ILDC13) output
- Fully-regulated output
- Short-circuit protection
- No minimum load
- Low EMI without ferrite beads
- 2500 V_{RMS} (DFN) or 4000 V_{RMS} isolation (SOIC)
- -40 °C to 125 °C

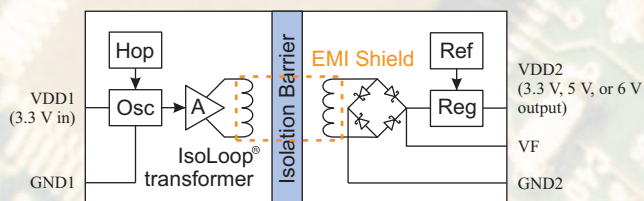

ILDC11 / ILDC12 / ILDC13
3.3 V input;
3.3 V, 5 V, or 6 V output DC-to-DC convertor

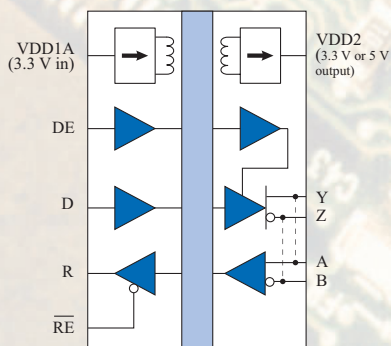

IL4xxx
RS-485 / RS-422 transceivers
with integrated DC-to-DC converters



**IL7611 / IL7612 / IL7614 /
IL7615 / IL7616 / IL7617**
2-, 3-, or 4-channel data couplers
with integrated DC-to-DC converters

Parameter	Min.	Typ.	Max.	Units
Output Voltage Ripple		1	5	mV _{P-P}
Line Regulation		32	40	mV/V
Load Regulation		5	6	%
Capacitive Load			1000	μF

Limited Warranty and Liability

Information in this document is believed to be accurate and reliable. However, NVE does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NVE be liable for any indirect, incidental, punitive, special or consequential damages (including, without limitation, lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Right to Make Changes

NVE reserves the right to make changes to information published in this document including, without limitation, specifications and product descriptions at any time and without notice. This document supersedes and replaces all information supplied prior to its publication.

Use in Life-Critical or Safety-Critical Applications

Unless NVE and a customer explicitly agree otherwise in writing, NVE products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical devices or equipment. NVE accepts no liability for inclusion or use of NVE products in such applications and such inclusion or use is at the customer's own risk. Should the customer use NVE products for such application whether authorized by NVE or not, the customer shall indemnify and hold NVE harmless against all claims and damages.

Applications

Applications described in this document are illustrative only. NVE makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NVE products, and NVE accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NVE product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customers. Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NVE does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customers. The customer is responsible for all necessary testing for the customer's applications and products using NVE products in order to avoid a default of the applications and the products or of the application or use by customer's third party customers. NVE accepts no liability in this respect.

Terms and Conditions of Sale

In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NVE hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NVE products by customer.

No Offer to Sell or License

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export Control

This document as well as the items described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Automotive Qualified Products

Unless the datasheet expressly states that a specific NVE product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NVE accepts no liability for inclusion or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NVE's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NVE's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NVE for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NVE's standard warranty and NVE's product specifications.

An ISO 9001 Certified Company

NVE Corporation
11409 Valley View Road
Eden Prairie, MN 55344-3617 USA
(952) 829-9217
www.nve.com
iso-info@nve.com



On the Cover

IsoLoop Isolation Products help make a digital world practical. Approximately 750 actual-size IsoLoop 8-pin MSOP Isolators form the image on the front and back spine of this catalog. NVE is the leader in isolator miniaturization with a full line of MSOP, QSOP, and narrow-body parts.